## 

### India

Hosur

Terex India Private Limited E-18,Phase II,Expansion-II SIPCOT Industrial Complex, Hosur-635 109 Tamil Nadu,India Tel: +91 4344 302000

#### Delhi

906-907 , 9th floor,Palm Spring Plaza Golf Course Road, DLF Phase 5, Sector 54, Gurugram, Haryana 122003 Tel: +91 81306 96290

#### North America

909 17th Street NE Cedar Rapids, IA 52402 Tel: +1 319 363 3511 or +1 800 821 5600 Fax: +1 319 399 4871

212 South Oak Street Durand, MI 48429 Tel: +1 989 288 3121 or +1 888 571 8352 Fax: +1 989 288 4113

#### Europe, Russia & Africa

Dungannon Business Park Killyliss Road, Dungannon Northern Ireland Tel: +44 (0) 28 8744 0795

#### Central Asia, Turkey & North Africa Region

Mehmet Akif Ersoy Mah.287.SkNo 1/D 06172 Yenimahalle - Ankara Turkev Tel: +90 312 354 90 90

### www.terexmps.com

Australia

133 Logis Boulevard Dandenong South, VIC 3175 Tel: +61 3 8794 4100

#### Sydney, New South Wales

114 Hassall St Tel: +61 2 9604 6524

585 Curtin Ave East Eagle Farm, QLD 4009 Tel: +61 7 3630 0866 Fax: +61 7 3630 1097

### 4 Miles Rd

Kewdale, WA 6105 Tel: +61 8 6254 4100 Fax: +61 8 9350 5534

#### Product specifications and prices are subject to change without notice or obligation. The photographs and/or drawings in this document are for illustrative purposes only. Refer to the appropriate Operator's Manual for instructions on the proper use of this equipment.

Failure to follow the appropriate Operator's Manual when using our equipment or failure to act responsibly may result in serious injury or death.

The only warranty applicable to our equipment is the standard written warranty applicable to the particular product and sale, and Terex makes no other warranty, express or implied. Terex, the Terex Crown design, Cedarapids, Canica, Simplicity, Jaques, El-Jay and Rollercone are trademarks of Terex Corporation or its subsidiaries. All rights are reserved. © 2017

Melbourne, Victoria Fax: +61 3 9706 7810

Wetherill Park, NSW 2164 Fax: +61 2 9604 9368

#### Brisbane, Queensland

## Perth, Western Australia

### Middle East, East Africa, and SE Asia

Office # 305, Pinnacle Building Sheikh Zayed Road, Al Barsha 1, Dubai, UAE Tel: +971 4 399 0381 Fax: +971 4 399 0382

#### Malaysia

Subang Jaya, Selangor, Malaysia Contact: Mr. Benjamin Tong Tel: +60(3) 5622 6103 or +60(3) 5622 6199 Fax : +60(3) 5631 6211


#### Thailand

777/1, Moo 7, Bangplee-Tumru Road, Bangpleeyai, Bangplee, Samutprakarn, 10540, Thailand Tel: +66 2 316 4656 or +66 2 316 4658 Fax: +66 2 316 4660

## 

# Terex<sup>®</sup> MPS Modular Plants

# MTJ1170 Jaw Plant

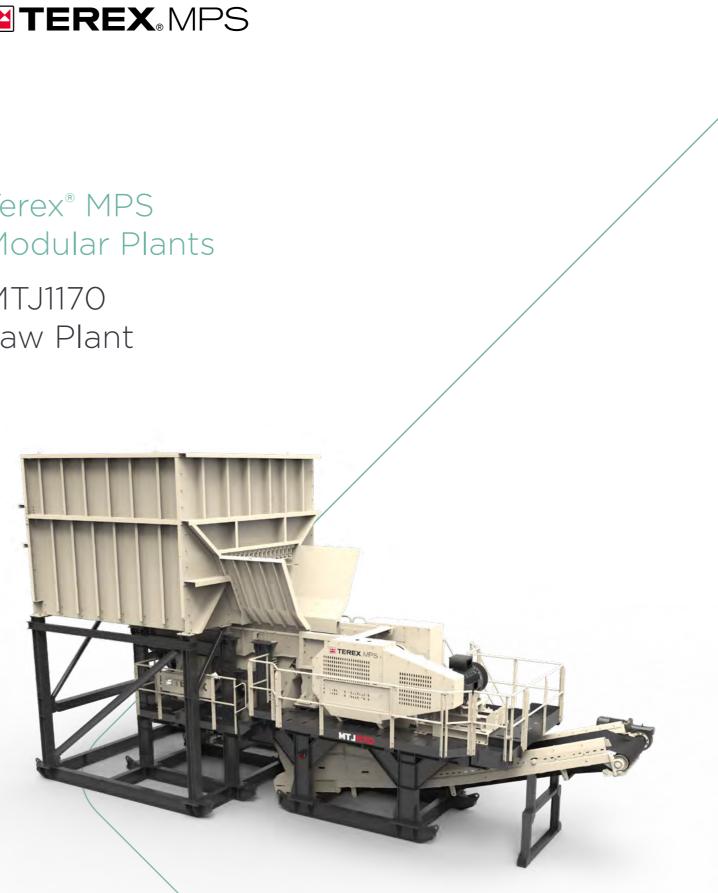



# Terex<sup>®</sup> MPS Modular Plants

# MTJ1170 Jaw Plant

### Exceptional Productivity & Efficiency

MTJ1170 Plant Specifications 1100X700 Jaw Crusher

### Standard Features


- 1100X700 Jaw Crusher with V-belt drive, motor mount, belt guard crusher motor 110 kW.
- Hydraulic Assist CSS adjustment.
- Two deck Vibrating Grizzly Feeder (14.3' x 42.5") with stepped grizzly, wear resistant side and fl oor liner plates, 15kW variable speed drive, belt driven sq. cage electric motor, heavy duty counter rotating shafts and oiled bearings.
- Crusher Chamber Hinged Protection Guard
- 2 way bypass chute diverts material passing grizzly to main product conveyor.
- Chute with handle operated fl ap gate directs the material from grizzly feeder mesh deck to off plant dirt conveyor or to under crusher main product conveyor.
- 1000 mm wide under crusher main product conveyor with -
- Feed boot with wear resistant liners and guards.
- Impact bars directly under conveyor feed area.
- Observation and walk around maintenance platforms with access ladder, walkways, and supports.
- Emergency stops 4 nos.
- Mounted on Heavy Duty Modular Skid Frame
- All electric plant.


### Electricals

 Jaw unit electricals including cable kit, control panel (standard plant set for 380V/50Hz) weather protected robust control panel houses user friendly controls ground mounted up to maximum 3m from plant

### Options

- Wing Hopper 10 cub mt capacity
- Truck Loading Hopper 20 cub mt capacity

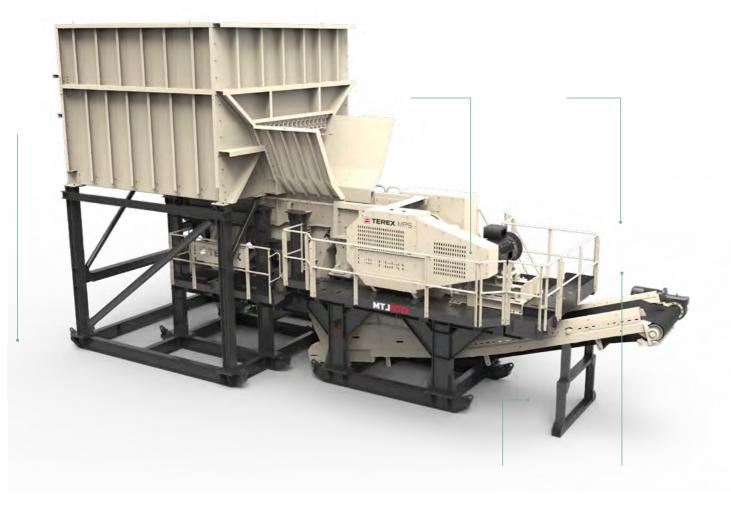

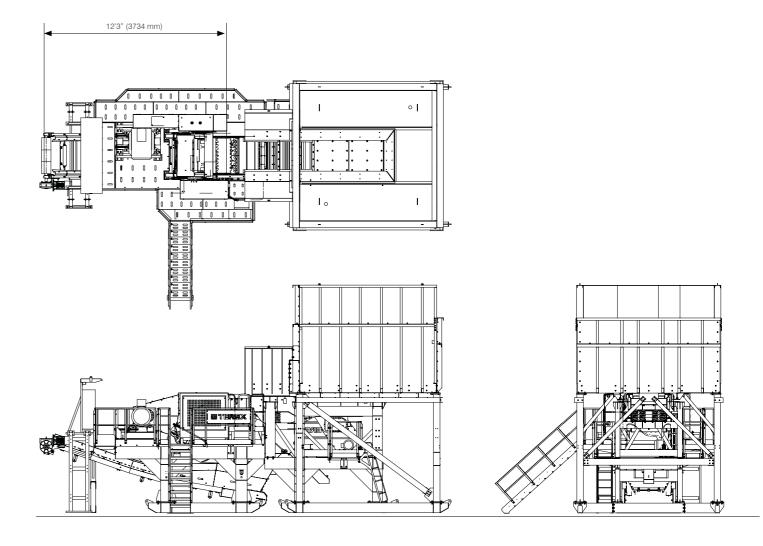

#### Jaw Specifications

truck dump hopper)

Approximate Component Weights & Basic Dimensions	
Max Feed Size	600 mm
Setting Range	75 mm - 125 mm
Capacity Range	90MTPH - 300MTPH
Total Connected Load	136 kW
Weight Module Structure (complete with feeder, crusher, and	46 tons