IMPACTOR 26 27

TRAKPACTOR 260

The Powerscreen® Trakpactor 260 horizontal shaft impactor is a compact track mobile crusher designed for the recycling and demolition markets. Capable of processing a wide range of material at a high output, the plant is versatile, easy to operate and fuel efficient due to its direct drive system.

Featuring the Powerscreen® Trakpactor 260 fixed hammer horizontal impactor, the plant offers users both excellent reduction and a high consistency of product shape alongside key features such as hydraulic overload protection.

Features & Benefits

- Replaceable tine bar cartridge style grizzly feeder
- Load management system to control feeder speed
- Crusher chamber: Patented hydraulic overload protection and adjustment system.
- 4 Bar rotor and twin apron design
- Economical to operate with HPTO clutch & highly fuel efficient direct drive system
- Crusher speed and conveyor height controlled with user-friendly PLC system
- Modular conveyor with raise/lower facility to aid clearance of rebar
- Dust suppression system
- Fitted with Powerscreen Pulse Telematics system


- Full and half size chrome, martensitic and ceramic blow bars
- 4 full size hammers in lieu of 2 full & 2 half hammers
- Various tine bar apertures
- Grizzly blanking mats
- Wire mesh for underscreen Single pole/twin pole magnet
- Belt scale
- Side conveyor
- Electric refuelling pump Plant lighting
- Radio remote control
- Hot/cold climate oil kits
- Blow bar removal tool
- Control panel positive pressurisation
- Fully independent under crusher vibrating pan feeder

- Blasted rock
- River rock
- C & D waste
- Foundry waste
- Processed ores
- Processed minerals

TRAKPACTOR 260	
Weight (Est)	27,000kg (59,525lbs) with side conveyor & magnet
Transport width	2.5m (8'2")
Transport length	13.40m (43'11")
Transport height	3.2m (10'6")
Working width	4m (13'1") with side conveyor
Working length	13.4m (43'10")
Working height	3.6m (11'10")
P	



Engines are available that are certified to US EPA and EU off road diesel emission standards. Talk to your dealer about possible certification options (i.e. Tier 3/Stage 3A:, Tier 4i/Stage 3B:, Tier 4F / Stage 4).

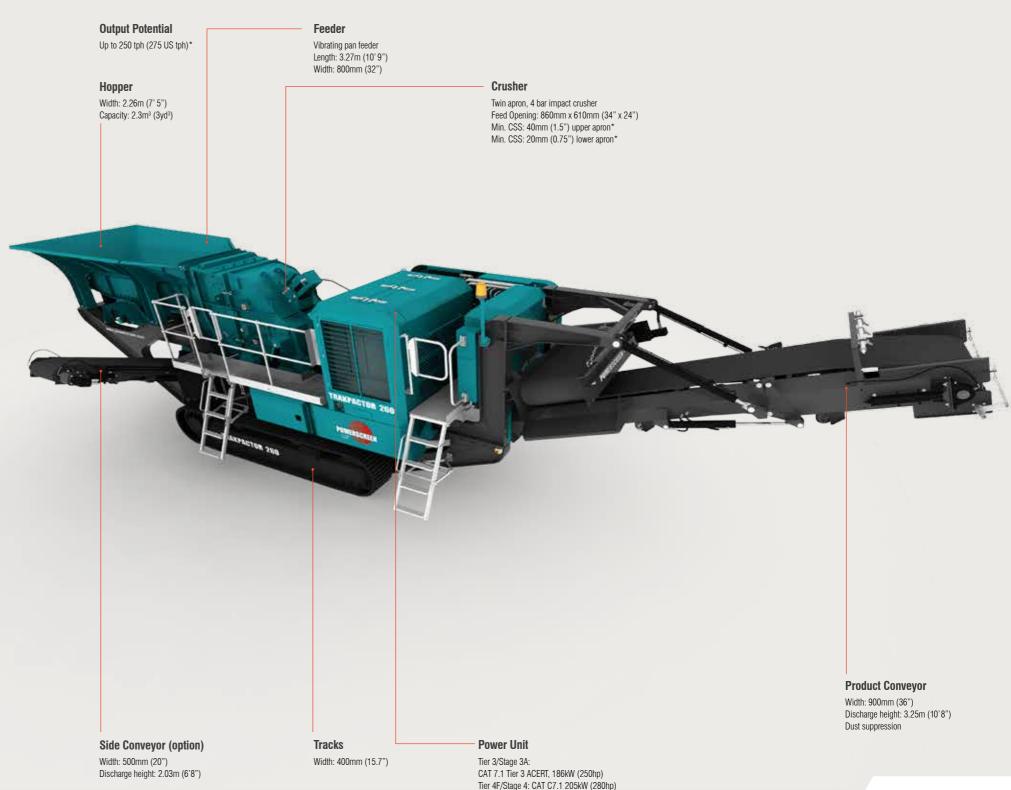

Fuel tank capacity: 400 L (106 US Gal)

